

2.5 kV

maximum
measuring
voltage for R_{ISO}

7"

touch
screen

ρ R_E
 R_{ISO} Z_s R_{CONT}
 E
complex
measurements of
installations

Insulation resistance specialist

- Measurement of insulation resistance using test voltage of 2.5 kV
- Visualization of R_{ISO} in the form of graphs: $R(t)/U(t)$, $R(t)/I(t)$, $U(t)/I(t)$, $I(U)$
- Absorption coefficients PI, DAR, AB1, AB2 and temperature coefficients k20, k40
- The largest touch screen on the market (7") – remarkable ergonomics and ease of use
- Removable microSD memory card – easy increase of memory capacity
- Li-Ion battery – longer operation of the meter
- Measurement of all parameters related to earthing and protection against electric shock – one device instead of several
- Quick measurement of the fault loop impedance in networks secured with RCD without triggering (up to several seconds) – time saver
- Auto measurements – the ability to perform automatic measurements in sequence – simplified measurements
- Fast path from measurements to report – time saver



Features

The meter offers a **wide range** of functionalities. It combines the measuring capabilities of several devices, while ensuring equally good accuracy.

MPI-536 can be used for all measurements for commissioning of electrical installations in accordance with applicable regulations:

- » short circuit loop impedance (also in circuits secured with RCDs),
- » RCD parameters,
- » insulation resistance,
- » earth resistance (4 measurement methods + soil resistivity measurement),
- » continuity of protective and equipotential bondings,
- » light intensity measurement,
- » phase sequence test,
- » motor rotation direction test.



Insulation control with a voltage of 2.5 kV

In the field of insulation resistance control, MPI-536 has very wide possibilities - its maximum measurement voltage is as much as **2500 V**. The insulation diagnostics is supported by the graphs $R(t)/U(t)$, $R(t)/I(t)$, $U(t)/I(t)$, $I(U)$, available both after and during the measurement. In addition, the instrument calculates the absorption coefficients PI, DAR, AB1, AB2 and the temperature coefficients k20, k40.

Automatic installation safety test

MPI-536 allows safety control of **residential, commercial and industrial electrical installations**. Measurements can be easily automated with:

- auto mode of residual current devices (RCD) tests,
- auto measurements – freely configurable measuring sequences,
- **AutoISO-2500** adapter for automatic insulation resistance test of 3-, 4- and 5-conductor cables, without switching.





Ease of reading

The device is equipped with a color TFT LCD touch screen with a resolution of 800x480 pixels and a diagonal of 7", which allows for convenient operation and easy reading of parameters and plotted waveforms. This screen size enables displaying more information, available at any time of use. The interface is visible in all conditions – also thanks to the appropriate size of displayed symbols. **Included stylus allows to work also with dielectric gloves.**

Built-in help system

The device has built-in help screens with measurement diagrams. Thanks to this you can easily and quickly check and make sure how to connect to a given system depending on the type of performed measurement.


Increased resistance to environmental conditions

The MPI-536 meter will cope well in difficult environmental conditions. Protection against penetration of dust and water is ensured by a unique housing with a level of protection IP51. It is resistant to mechanical damage, and a special design allows you to easily protect the touch screen by shielding using the cover of the meter. In addition to the fact that it protects against damage, it also allows you to conveniently carry and use the device in different positions.

Communication and software

A very strong feature of the device is the multitude of communication interfaces and cooperation with external software. You can easily transfer measurement data to your computer via USB port, removable SD memory card, or wireless communication (Bluetooth, Wi-Fi).

In order to generate a report on measurements for electric shock protection, use **Sonel Reports PLUS** software. Saving the downloaded data to the simplest formats and printing is provided by free **Sonel Reader** software.

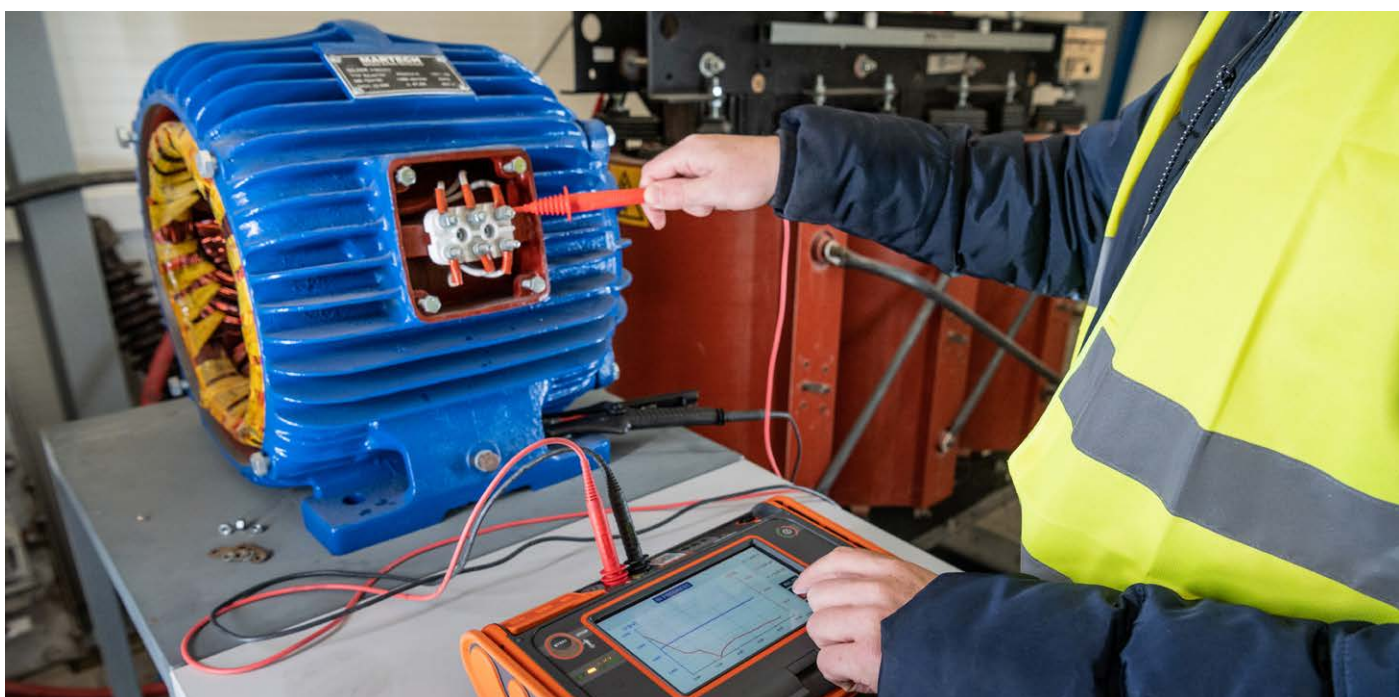

Specifications

Measurement functions	Measurement range	Display range	Resolution	Accuracy ±(% m.v. + digits)
Fault loop impedance				
Fault loop Z_{L-PE} , Z_{L-N} , Z_{L-L}	0.13 Ω...1999.9 Ω acc. to IEC 61557	0.000 Ω...1999.9 Ω	from 0.001 Ω	±(5% m.v. + 30 digits)
Fault loop Z_{L-PE} in RCD mode	from 0.50 Ω...1999 Ω acc. to IEC 61557	0.00 Ω...1999 Ω	from 0.01 Ω	from ±(6% m.v. + 5 digits)
Measurements of RCD parameters				
RCD tripping test and measurement of tripping time t_A measuring current $0.5 I_{\Delta n}$, $1 I_{\Delta n}$, $2 I_{\Delta n}$, $5 I_{\Delta n}$				
general and short-time delay RCD	0 ms...300 ms	0 ms...300 ms	1 ms	from ±(2% m.v. + 2 digits)
selective RCD	0 ms...500 ms	0 ms...500 ms	1 ms	from ±(2% m.v. + 2 digits)
Measurement of RCD tripping current I_A measuring current $0.2 I_{\Delta n}$... $2.0 I_{\Delta n}$				
for sinusoidal residual current (AC type)	3.3 mA...1000 mA	3.3 mA...1000 mA	from 0.1 mA	±5% $I_{\Delta n}$
for unidirectional residual current and unidirectional with the 6 mA DC bias (type A)	3.5 mA...700 mA	3.5 mA...700 mA	from 0.1 mA	±10% $I_{\Delta n}$
for direct residual current (type B)	2.0 mA...1000 mA	2.0 mA...1000 mA	from 0.1 mA	±10% $I_{\Delta n}$
Earth resistance				
3- and 4-pole method	from 0.50 Ω...1.99 kΩ acc. to IEC 61557-5	0.00 Ω...1.99 kΩ	from 0.01 Ω	from ±(2% m.v. + 3 digits)
3-pole + clamp method	0.00 Ω...1.99 kΩ	0.00 Ω...1.99 kΩ	from 0.01 Ω	from ±(2% m.v. + 4 digits)
2-clamp method	0.00 Ω...99.9 kΩ	0.00 Ω...99.9 kΩ	from 0.01 Ω	from ±(10% m.v. + 4 digits)
Resistance-to-earth	0.0 Ωm...99.9 kΩm	0.0 Ωm...99.9 kΩm	from 0.1 Ωm	Depending on accuracy of R_E measurement
Insulation resistance				
Measuring voltage 10 V	10 kΩ...9.99 MΩ acc. to IEC 61557-2	0 kΩ...9.99 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 50 V	50 kΩ...250 MΩ acc. to IEC 61557-2	0 kΩ...250 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 100 V	100 kΩ...500 MΩ acc. to IEC 61557-2	0 kΩ...500 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 250 V	250 kΩ...999 MΩ acc. to IEC 61557-2	0 kΩ...999 MΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 500 V	500 kΩ...2.00 GΩ acc. to IEC 61557-2	0 kΩ...2.00 GΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 1000 V	1000 kΩ...3.00 GΩ acc. to IEC 61557-2	0 kΩ...3.00 GΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 1500 V	1500 kΩ...5.00 GΩ acc. to IEC 61557-2	0 kΩ...5.00 GΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Measuring voltage 2500 V	2500 kΩ...9.99 GΩ acc. to IEC 61557-2	0 kΩ...9.99 GΩ	from 1 kΩ	from ±(3% m.v. + 8 digits)
Resistance of protective conductors and equipotential bondings				
Measurement of resistance of protective conductors and equipotential bondings with ±200 mA current	0.12 Ω...400 Ω acc. to IEC 61557-4	0.00 Ω...400 Ω	from 0.01 Ω	±(2% m.v. + 3 digits)
Measurement of resistance with low current	0.0 Ω...1999 Ω	0.0 Ω...1999 Ω	from 0.1 Ω	±(3% m.v. + 3 digits)
Light intensity				
Measurement in luxes (lx)	0 lx...399.9 klx	0 lx...399.9 klx	from 0.001 lx	from ±(2% m.v. + 5 digits)
Measurement in feet-candles (fc)	0 fc...39.99 kfc	0 fc...39.99 kfc	from 0.001 fc	from ±(2% m.v. + 5 digits)
Phase sequence indication	in the same direction (correct), opposite direction (incorrect), U_{LL} voltage: 95 V...500 V (45 Hz...65 Hz)			

Other technical data

Safety and work conditions

Measuring category according to EN 61010	IV 300 V, III 500 V
Ingress protection	IP51
Type of insulation according to EN 61010-1 and IEC 61557	double
Dimensions	288 x 223 x 75 mm
Weight	ca. 2.5 kg
Operating temperature	0...+45°C
Storage temperature	-20...+60°C
Humidity	20...90%
Nominal temperature	23 ± 2°C
Reference humidity	40%...60%

Memory and communication

Memory of measurement results	unlimited
Data transmission	USB 2.0

Other information

Quality standard – development, design and production	ISO 9001
The product meets the EMC (emission for industrial environment) requirements according to standards	EN 61326-1 EN 61326-2-2

Standard accessories



Test lead 1,2 m (banana plugs) red / blue / yellow

WAPRZ1X2REBB
WAPRZ1X2BUBB
WAPRZ1X2YEBB



Crocodile clip 1 kV 20 A red / blue / yellow

WAKRORE20K02
WAKROBU20K02
WAKROYE20K02



Pin probe 1 kV (banana socket) red / blue / yellow

WASONREOGB1
WASONBUOGB1
WASONYEOGB1



Test lead 5 kV 1.8 m (banana plugs) red / black shielded

WAPRZ1X8REBB
WAPRZ1X8BLBB



WS-03 adapter with START button with UNI-Schuko plug

WAADAWS03

2x earth contact test probe (rod), 30 cm

WASONG30



Crocodile clip 11 kV 32 A black

WAKROBL32K09

Pin probe 5 kV (banana socket) red

WASONREOGB2



Test lead on a reel 15 m / 30 m

WAPRZ015BUBBSZ
WAPRZ030REBBSZ



Charging

Mains cable with IEC C7 plug

WAPRZLAD230

Z7 power supply

WAZASZ7



Cable for battery charging from car cigarette lighter socket (12 V)

WAPRZLAD12SAM

Li-Ion battery 11.1 V 3.4 Ah

WAAKU15



USB cable

WAPRZUSB



L2 hanging straps (set)

WAPOZSZEKPL

L2 carrying case

WAFUTL2



Factory calibration certificate

Optional accessories



EVSE-01 adapter for testing vehicle charging stations
WAADAEVSE01



AutoISO-2500 adapter
WAADAAISO25



WS-04 adapter with UNI-SCHUKO angular plug
WAADAWS04



C-3 clamp (Ø 52 mm)
WACEGC30KR



N-1 transmitting clamp (Ø 52 mm)
WACEGN1BB



TWR-1J RCD breaker testing adapter
WAADATWR1J



PRS-1 resistance test probe
WASONPRS1GB



Foldable pin probe, 1 kV, 2 m (banana socket)
WASONSP2M



Test lead for fault loop measurement (banana plugs) 5 m / 10 m / 20 m
WAPRZ005REBB
WAPRZ010REBB
WAPRZ020REBB



Test wire reel
WAPOZSZP1



Test lead for earth resistance measurement 25 m
WAPRZ025BUBBSZ



Test lead for earth resistance measurement 50 m
WAPRZ050YEBBSZ



Cramp with banana socket
WAZACIMA1



Earth contact test probe 80 cm
WASONG80V2



L-3 carrying case (for 80 cm test probes)
WAFUTL3



CS-1 cable simulator
WAADACS1



CS-5kV calibration box
WAADACS5KV



Industrial socket adapter 16 A / 32 A
WAADAAGT16T
WAADAAGT32T



Three-phase socket adapter 16 A / 32 A
WAADAAGT16C
WAADAAGT32C



Three-phase socket adapter 16 A / 32 A
WAADAAGT16P
WAADAAGT32P



Three-phase socket adapter 63 A
WAADAAGT63P



LP-10A light meter probe with WS-06 plug
set
WAADALP10AKPL

only probe with miniDIN-4P plug
WAADALP10A

only WS-06 adapter with miniDIN-4P socket
WAADAWS06



LP-10B light meter probe with WS-06 plug
set
WAADALP10BKPL

only probe with miniDIN-4P plug
WAADALP10B

only WS-06 adapter with miniDIN-4P socket
WAADAWS06



LP-1 light meter probe with WS-06 plug
set
WAADALP1KPL

only probe with miniDIN-4P plug
WAADALP1

only WS-06 adapter with miniDIN-4P socket
WAADAWS06



4 GB microSD card
WAPOZMSD4



Sonel Reports PLUS software
WAPROREPORTSPUS



Calibration certificate with accreditation